



ALFA-LUB



DIAPHRAGM PUMP FOR

Series 3/4"

R.1:1 - 70 l/min

membrane NBR High Nitrile

The transfer diaphragm pumps, specific for oil and allied products in die-cast aluminium, with High-quality components, ensure lasting and reliable operation even in extreme conditions.

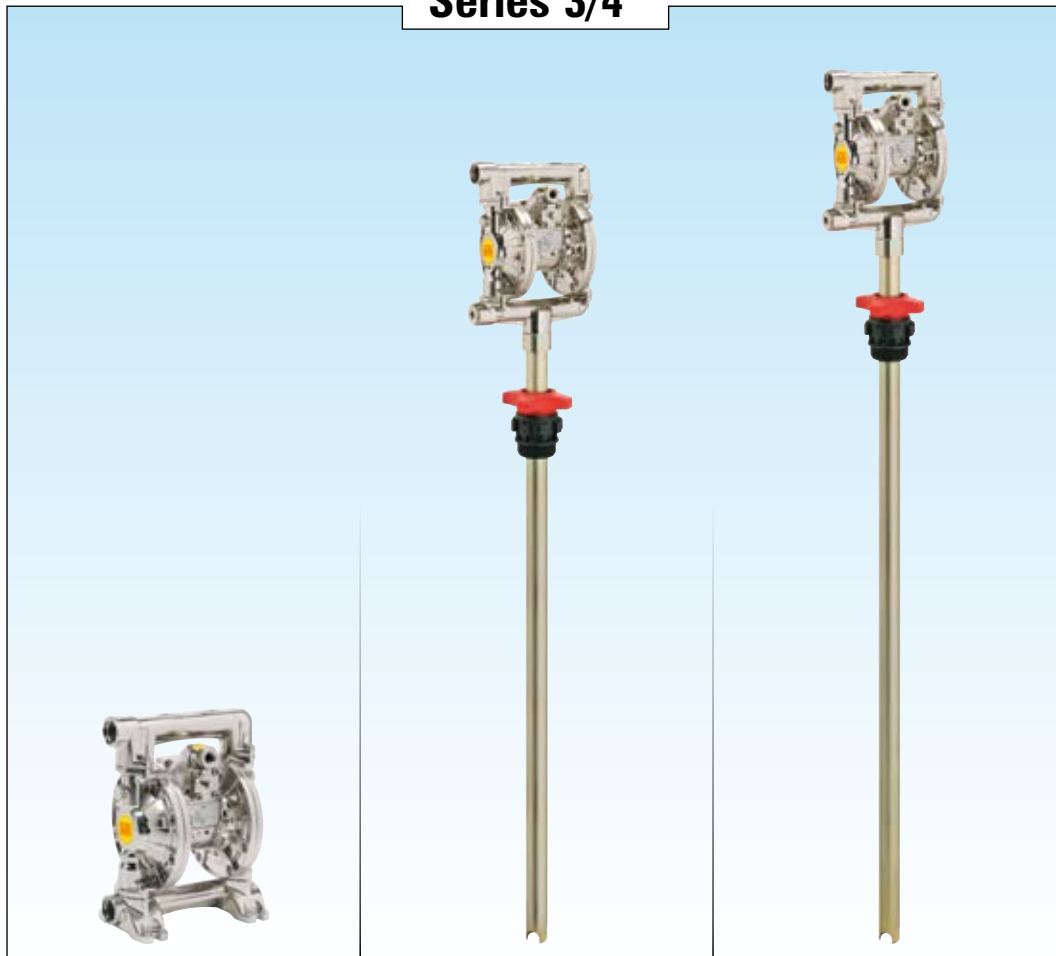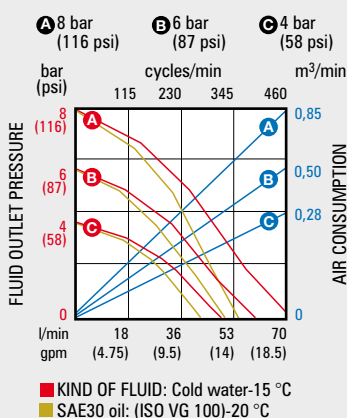

Article	0A322011NHHV2	0A33400	0A33405
Membrane material	NBR High Nitrile	NBR High Nitrile	NBR High Nitrile
Motor material	Aluminium	Aluminium	Aluminium
Wet parts	Aluminium	Aluminium	Aluminium
Ball valve material	Hytrel	Hytrel	Hytrel
Valve seat material	Hytrel	Hytrel	Hytrel
Compatible fluids	Water, mineral-vegetable oils, diesel oil		
Air inlet connection	F3/8" G	F3/8" G	F3/8" G
Fluid inlet-outlet connection	F3/4" x F3/4" G	suction tube ø 34 mm - F3/4" G	suction tube ø 34 mm - F3/4" G
Air working pressure	2-6 bar	2-6 bar	2-6 bar
Air max. pressure	8 bar	8 bar	8 bar
Max. air consumption m³/min	0,80	0,80	0,80
Relative flowrate (free outlet at 8 bar)	70 l/min	70 l/min	70 l/min
Noise level	75 dB	75 dB	75 dB
Deliverable fluid temperature	-10+50°C	-10+50°C	-10+50°C
Max. solids diameter	ø 1,5 mm	ø 1,5 mm	ø 1,5 mm
Suitable for drums or tanks	-	for drums (180-220 Kg)	for tanks
Suction tube length	-	940 mm	1240 mm
Suction-delivery ball valve WITH SPRING			
	N° 1 packing m³ 0,020 Kg 8,0	N° 2 packing m³ 0,040 Kg 11	N° 2 packing m³ 0,040 Kg 14