


# Smooth Bore Oil Suction & Discharge Hose

## Type 283

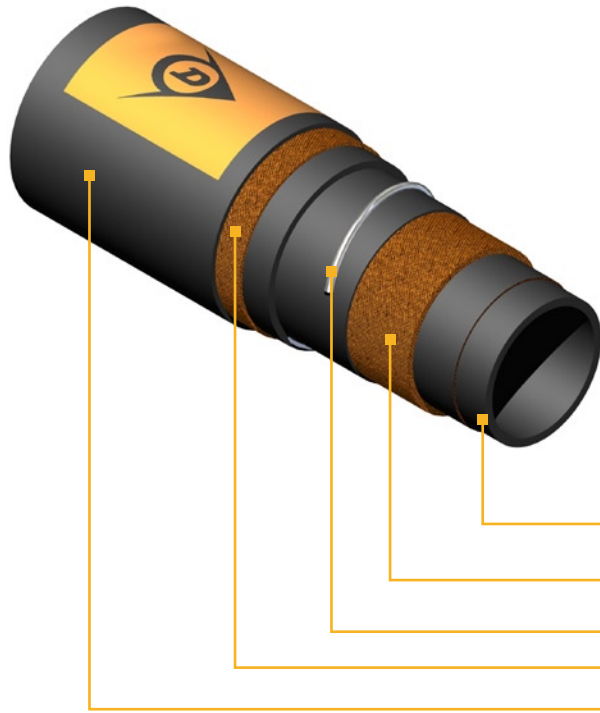

Application	Lightweight, flexible hoses offering easy handling. Generally used at dockside and jetty locations where the working conditions do not call for high crush resistance or tensile strength.		
Specification	BS EN 1765: 2004 Type S15	Working / Burst Pressures	15 / 60 Bar

Hose Component	Description
Lining	Synthetic rubber compound for petroleum products with an aromatic content up to 60%
Main reinforcement	Multiple plies of high tenacity rayon cord designed for a combination of high strength and resistance to fatigue. Each layer is fully encapsulated in rubber to prevent abrasion with adjacent layers.
Embed wire	Helical steel wire to resist collapse and crush loads
Holding ply	Textile reinforcement to increase adhesion between hose body and cover
Cover	Weathering and abrasion resistant rubber compound
Fittings	Built-in steel nipples with flanges to suit customer requirements

Hose Characteristics										
	2in.	2.5in.	3in.	4in.	5in.	6in.	8in.	10in.	12in.	16in.
Internal Diameter (mm)	50.8	63.5	76.2	101.6	127	152.4	203.2	254	304.8	387
Outside Diameter (mm) (nominal)	79	92	105	132	158	189	245	297	352	454
Hose Body Weight (kg/m)	3.9	4.7	5.8	8.1	9.9	14.9	23.1	30.2	39.1	76.8
Hose End Weight (kg/hose)	11	14	18	29	38	46	67	96	122	150
Min. Bend Radius (m)	0.3	0.38	0.46	0.6	0.76	0.9	1.2	1.5	1.8	2.3
Safe Working Tensile Load (tonnes)	1.2	1.1	1.7	1.4	2.5	3.5	6.9	7.6	6.4	37.2
Operating Temperature (all sizes)	-20°C to +82°C									
Electrical Continuity	Electrically continuous or discontinuous as required.									
<i>For alternative sizes, lining materials or pressure / temperature ratings please contact us.</i>										



Dunlop Oil & Marine Ltd  
 Moody Lane, Pyewipe  
 Grimsby, DN31 2SY  
 England

T: +44 (0) 1472 359281  
 F: +44 (0) 1472 362948  
 E: [dunlop.sales@dunlop.co.uk](mailto:dunlop.sales@dunlop.co.uk)  
[www.dunlop-oil-marine.co.uk](http://www.dunlop-oil-marine.co.uk)



ContiTech Division  
 of Continental AG