

HERCULES

100% EPDM RUBBERWALL


The difference makes
Evolution



Evolution makes
the difference



HERCULES

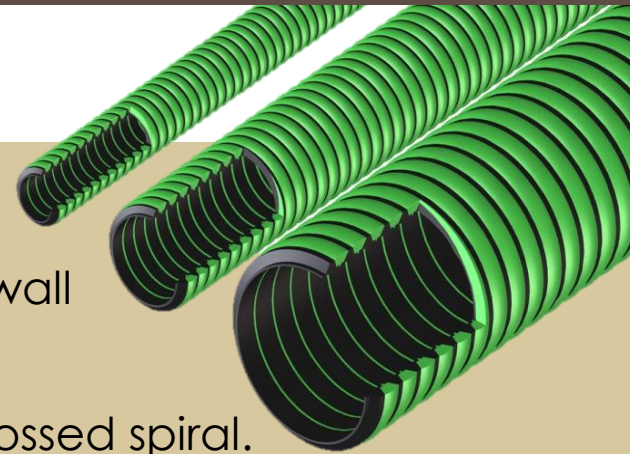

- Hose made with 100% EPDM rubber wall with Polyethylene spiral.
- Smooth inside and outside with embossed spiral.
- Flexible at low temperatures: from -40°C to +60°C
- Resistant to abrasion, ageing, weather conditions and to most chemicals.
- Used in agriculture, septic tank cleaning, marine environment, chemical industry, mines, quarries and construction industry.

Data sheet

Part number	Ø ins.	Min. Wall Thickness	Max Wall Thickness	Weight	Working Pressure	Bursting Pressure	Vacuum	Bending Radius	Roll Length	Volume
	[mm]	[mm]	[mm]	[g/m]	[bar]	[bar]	[m H2O]	[mm]	[m]	[m ³]
HE 01 025.4 000.0	25,4	4,1	5,1	410	3,2	10	9	80	50	0,103
HE 01 031.8 000.0	31,8	4,1	5,1	500	2,5	8	9	90	50	0,134
HE 01 038.1 000.0	38,1	4,5	5,5	640	2,3	7	9	100	50	0,198
HE 01 050.8 000.0	50,8	5,2	6,5	1000	2,0	6	9	130	50	0,320
HE 01 063.5 000.0	63,5	6,0	7,3	1400	1,9	6	9	170	50	0,544
HE 01 076.2 000.0	76,2	6,1	7,6	1700	1,6	5	8,5	240	50	0,697
HE 01 101.6 000.0	101,6	7,6	9,0	2700	1,5	4	8,5	300	30	0,743
HE 01 127.0 000.0	127	7,7	9,1	3400	1,2	4	8	400	30	1,007
HE 01 152.4 000.0	152,4	8,3	10,3	4500	1,1	3	8	510	20	1,356

