




code	inside diameter		outside diameter		working pressure		burst pressure		weight nominal		bending radius		vacuum	length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	bar	m	ft
0801183	16	5/8	26	1,02	10	150	30	450	0,45	0,30	60	2,4	0,9	120	400
1439510	25	1	35	1,38	10	150	30	450	0,64	0,43	100	3,9	0,9	120	400
1439502	32	1-1/4	42	1,65	10	150	30	450	0,79	0,53	130	5,1	0,9	120	400
1439537	38	1-1/2	49	1,93	10	150	30	450	1,00	0,67	150	5,9	0,9	120	400
1440829	51	2	62	2,44	10	150	30	450	1,33	0,90	205	8,1	0,9	120	400
1439898	63,5	2-1/2	75	2,96	10	150	30	450	1,91	1,28	255	10,0	0,9	120	400
1439529	76	3	87,5	3,45	10	150	30	450	2,25	1,51	305	12,0	0,9	120	400
0801191	100	3-15/16	113	4,45	10	150	30	450	3,47	2,33	400	15,7	0,9	120	400
1449818	127	5	145	5,71	10	150	30	450	5,63	3,79	510	20,1	0,9	60	200
1440659	152	6	171	6,74	10	150	30	450	7,70	5,17	610	24,1	0,9	60	200

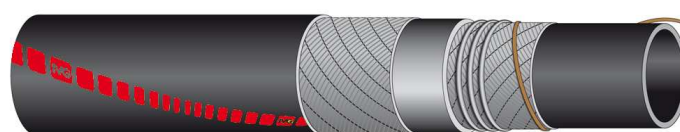

EN

Hydraulic oil suction and discharge hose

Application: hardwall hose, flexible and lightweight, used for the suction and delivery of oil with aromatic content up to 30% in hydraulic systems, excluding oils with ester base.

Temperature: from -20°C (-4°F) to +100°C (+212°F).

Construction

Tube: black, smooth synthetic rubber.

Reinforcement: high strength synthetic cord, antistatic copper wire, and steel helix wire.

Cover: black, smooth (wrapped finish), synthetic rubber, weathering resistant.

Branding: continuous red spiral stripe "IVG OIL (family logo)...".