








## POLYURETHANE RECOILS WITH SCRATCH-RESISTANT FITTINGS

Easy to handle	Flexible	Construction Polyurethane Polyether 98 A shores	Rigid fitting Teflon-coated Scratch-resistant	Temperature Max. 70°C	Pressure P.N.8 bar	Swivel fitting Teflon-coated Scratch-resistant	Silicone free		
		Colour	Diameter ID/OD mm	Length Max m	Rigid fitting Inlet end	Coil diameter mm	Min. length m	Swivel fitting Tool end	REFERENCE
<b>Mini polyurethane recoils with push-in fittings</b>									
	Recoils fitted with RPD MG CONEX push-in fittings								
	Blue	2,5 x 4	2	G 1/8	24	0,19	G 1/8	PUS 22	
	Blue	2,5 x 4	4	G 1/8	24	0,39	G 1/8	PUS 24	
	Bleu	4 x 6	2	G 1/4	32	0,23	G 1/4	PUS 42	
	Bleu	4 x 6	4	G 1/4	32	0,48	G 1/4	PUS 44	
<b>Polyurethane recoils with rigid and swivelling male fittings</b>									
	Blue	5 x 8	2	R 1/4	42	0.18	R 1/4	PUS 52	
	Blue	5 x 8	4	R 1/4	42	0.40	R 1/4	PUS 54	
	Blue	5 x 8	6	R 1/4	42	0.60	R 1/4	PUS 56	
	Blue	5 x 8	8	R 1/4	42	0,80	R 1/4	PUS 58	
	Blue	6.5 x 10	4	R 1/4	52	0.40	R 1/4	PUS 64	
	Blue	6.5 x 10	6	R 1/4	52	0.63	R 1/4	PUS 66	
	Blue	6.5 x 10	8	R 1/4	52	0.80	R 1/4	PUS 68	
	Blue	6.5 x 10	10	R 1/4	52	0.95	R 1/4	PUS 610	
	Blue	8 X 12	4	R 3/8	65	0.40	R 3/8	PUS 84	
	Blue	8 x 12	6	R 3/8	65	0.65	R 3/8	PUS 86	
	Blue	8 x 12	8	R 3/8	65	0.72	R 3/8	PUS 88	
	Blue	8 x 12	15	R 3/8	65	1.35	R 3/8	PUS 815	
	Blue	11 x 16	4	R 1/2 Fixed	90	0.40	R 1/2 Fixed	PUS 114	
	Blue	11 x 16	8	R 1/2 Fixed	90	0.80	R 1/2 Fixed	PUS 118	
<b>Polyurethane recoils with rigid and swivelling male fittings</b>									
	Red	6.5 x 10	4	R 1/4	42	0.40	R 1/4	PUS 64R	
	Red	6.5 x 10	6	R 1/4	52	0.63	R 1/4	PUS 66R	
<b>Polyurethane recoils with rigid and swivelling male fittings</b>									
	Yellow	6.5 x 10	4	R 1/4	42	0.40	R 1/4	PUS 64J	
	Yellow	6.5 x 10	6	R 1/4	52	0.63	R 1/4	PUS 66J	

# POLYURETHANE RECOILS WITH SCRATCH-RESISTANT FITTINGS

Easy to handle	Flexible	Construction Polyurethane Polyether 98 A shores	Rigid fitting Teflon-coated Scratch-resistant	Temperature Max. 70°C	Pressure P.N.8 bar	Swivel fitting Teflon-coated Scratch-resistant	Silicone free		
		Colour	Diameter ID/OD mm	Length Max m	Rigid fitting Inlet end	Coil diameter mm	Min. length m	Swivel fitting Tool end	REFERENCE
<b>Polyurethane recoils with rigid and swivelling male fittings</b>									
	Green	6.5 x 10	4	R 1/4	42	0.40	R 1/4	PUS 64V	
	Green	6.5 x 10	6	R 1/4	52	0.63	R 1/4	PUS 66V	
<b>Polyurethane recoils with rigid and swivelling male fittings</b>									
	Black	6.5 x 10	4	R 1/4	42	0.40	R 1/4	PUS 64NR	
	Black	6.5 x 10	6	R 1/4	52	0.63	R 1/4	PUS 66NR	

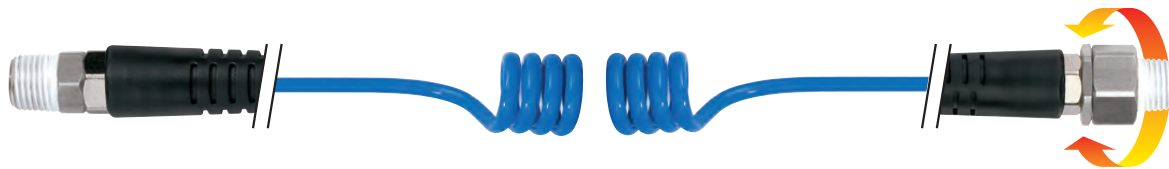

[www.hcdflowtech.co.nz](http://www.hcdflowtech.co.nz)

**WHANGAREI**  
43 PORT ROAD  
WHANGAREI  
P: 09 438 1598  
F: 09 438 1599

**AUCKLAND (HO)**  
144 NEILSON ST  
ONEHUNGA  
P: 09 636 5902  
F: 09 636 6554

**HAMILTON**  
18 KING ST  
FRANKTON  
P: 07 847 7889  
F: 07 438 1599

**MT MAUNGANUI**  
69 HULL ROAD  
MT MAUNGANUI  
P: 07 575 5697  
F: 07 575 5297

**HASTINGS**  
102 McLEAN ST  
HASTINGS  
P: 06 878 5824  
F: 06 878 5860

**WELLINGTON**  
148 HUTT ROAD  
PETONE  
P: 04 560 3701  
F: 04 560 3705

**NELSON**  
70 PASCOE ST  
ANNESBROOK  
P: 03 547 0531  
F: 03 547 0532

**CHRISTCHURCH**  
72 HAYTON RD  
WIGRAM  
P: 03 348 8755  
F: 08 348 8756

**DUNEDIN**  
301 VOGEL ST  
DUNEDIN  
P: 03 455 7657  
F: 03 455 7687