

OIL DISTRIBUTION PUMPS - Series 900

Ratio **5:1** - 45 l/min

Polyurethane Seals


Ratio **7:1** - Capacity 30 l/min

Polyurethane Seals

Art. 0AC9051

**Integral modular pump
R 5:1 - 45 l/min**

N° 1 packing m^3 0,040 Kg 12

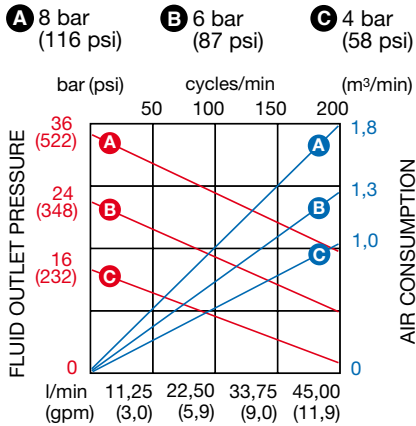

KIND OF FLUID: SAE30 oil (ISO VG 100) - 20 °C

New



**Art.
0AC9051**

Series 900 industrial air-operated double-acting pumps for distribution. Suitable for transferring oils, lubricants and allied products also with very high viscosity. The double action guarantees the delivery of a continuous and constant flow, ideal for all needs. Particularly effective in systems equipped with several distribution points.

Art. 0AC9071

**Integral modular pump
R 7:1 - 30 l/min**

N° 1 packing m^3 0,040 Kg 11

Art. 0AC9171


**Integral pump R 7:1 - 30 l/min
with 940 mm suction tube**

N° 1 packing m^3 0,070 Kg 13

Art. 0AC9271

**Integral pump R 7:1 - 30 l/min
with 1260 mm suction tube**

N° 1 packing m^3 0,080 Kg 15

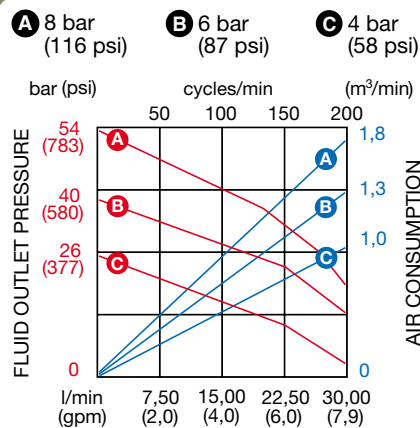

KIND OF FLUID: SAE30 oil (ISO VG 100) - 20 °C

New



**Art.
0AC9071**



**Art.
0AC9171**



**Art.
0AC9271**

Article	0AC9051	0AC9071	0AC9171	0AC9271
Compatible fluids	oils, lubricants and allied products			
Suction tube upper body	aluminium	aluminium	aluminium	aluminium
Suction tube	carbon steel	carbon steel	carbon steel	carbon steel
Air inlet connection	F 1/2" G	F 1/2" G	F 1/2" G	F 1/2" G
Fluid outlet connection	F 3/4" G	F 3/4" G	F 3/4" G	F 3/4" G
Suction tube diameter	ø 62	ø 53	ø 53	ø 53
Max. air consumption 8 bar	1,6 m³/min	1,6 m³/min	1,6 m³/min	1,6 m³/min
Noise level	81 dB	80 dB	81 dB	80 dB
Air max. pressure	8 bar	8 bar	8 bar	8 bar
Suitable for drums or tanks	modular	modular	of 180 - 220 Kg	tanks
Suction tube length	220 mm	220 mm	940 mm	1260 mm