


## OILS - CHEMICALS PLUTONE PK

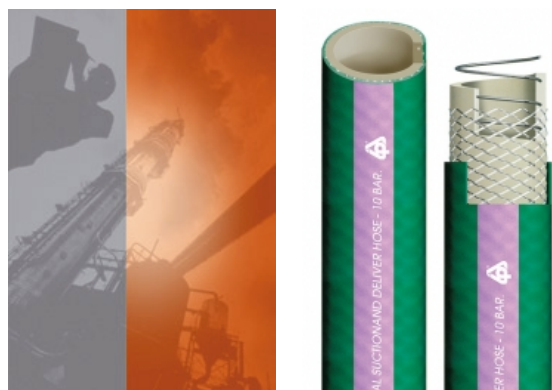

### PLUTONE PK

**Colour:** inside white, outside green with a violet stripe for easy identification.

**Temperature range:** from - 30° C to + 80° C (- 22 F/+ 176 F).


**Features:** TPV rubber hose reinforced with harmonic steel spiral and polyester yarn, it's resistant to abrasion, ageing, atmospheric agents and ozone.

**Application fields:** for suction and delivery of acids and chemicals\*.


\*Please consult our chemical resistance chart before use.

### Technical Data


Part number	Inside Ø	Outside Ø	Weight	Working press.	Bursting press.	Vacuum	Bending radius	Roll length	Volume
	mm	mm	g/m	bar	bar	mH2O	mm	mt	m <sup>3</sup>
PK 01 020.0 029.0	20	29	390	10	30	10	80	60	0,106
PK 01 025.0 035.0	25	35	550	10	30	10	100	60	0,135
PK 01 032.0 043.0	32	43	740	10	30	9	130	60	0,214
PK 01 038.0 049.0	38	49	860	10	30	9	150	30	0,228
PK 01 050.0 063.0	50	63	1390	10	30	8	250	30	0,286
PK 01 063.0 077.0	63*	77	1820	10	30	8	320	30	0,372
PK 01 076.0 091.0	76*	91	2270	10	30	7	380	30	0,603
PK 01 102.0 118.0	102*	118	3290	10	30	7	510	20	0,801

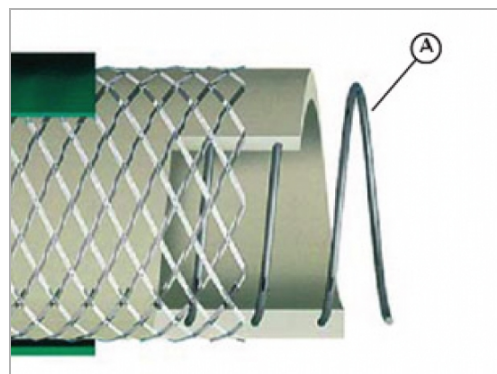

Spiral: Harmonic steel wire

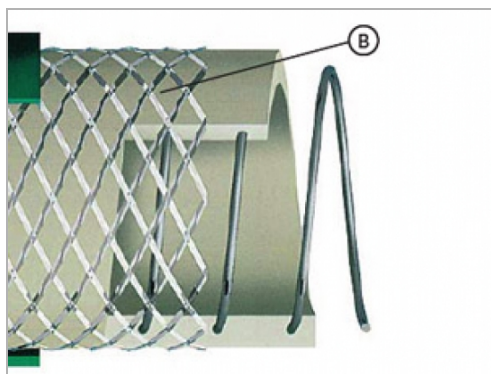

Reinforcement: Polyester high tenacity yarn

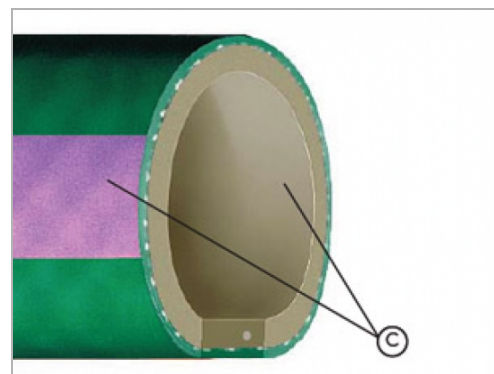

Tube and Cover: TVP rubber

\*Please consult our offices for these sizes and others not herewith listed