




code	inside diameter		working pressure		burst pressure		weight nominal		bending radius		vacuum	length max	
	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	bar	m	ft
1457276	76	3	6	90	18	270	2,52	1,69	200	7,9	0,7	60	200

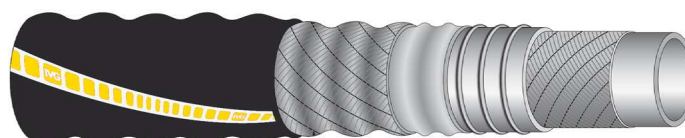

EN

Tank truck hose for the suction and discharge of milk and liquid foods

Standards: F.D.A. title 21, item 177.2600 for aqueous foods , Bfr XXI kat. 2 for aqueous and fatty foods, D.M. 21/03/73 for aqueous foods and alcohol until 96%, Reg. CE 1935/04 and CE 2023/06.

Application: light weight suction and delivery hardwall hose with corrugated cover, suitable for conveying milk and liquid foods. It is extremely flexible and easy to handle, specifically designed for milk collection in tank truck operations. It is completely odourless and taste free.

SPECIAL APPLICATIONS: soft ends at both ends.

Temperature: from -40°C (-40°F) to +120°C(+248°F).

Construction

Tube: clear white, smooth, food quality, taste free and odourless IIR rubber compound.

Reinforcement: high strength synthetic cord plus embedded steel helix wire.

Cover: black, smooth (wrapped finish), CR rubber compound, antistatic, resistant to weathering, abrasion and oil traces.

Branding: FOOD SCOTLAND OND FDA TITLE 21 Bfr XXI Kat. 2 IVG BROKEN STRIPE, HCD WEBSITE.

Above technical data are referring to applications at room temperature (+20°C).

IVG Colbachini is not liable for the use that differs from what is confirmed in their catalogues, product sheets, offers, order confirmations and contained recommendations. For a correct use refer to "Recommendations for the selection, storage, use and maintenance of rubber hoses" by Assogomma, available on www.ivgspa.it.