

BALL VALVE - LEVER HANDLE F/F

Model: EH1080


Advantica british gas, wras, en331 approved ball valves
Forged brass gas ball valve;
yellow stainless steel lever handle;
FxF
ISO7/1 thread,
EN331 standard
PN40~PN25(5MOP/20MOP)

Size: 1/4"~2"

TECHNICAL FEATURES:

According to EN331 standard.
Minimum and maximum working temperature:
-20°C, 120°C.
Available: in all sizes from 1/4" up to 4"

Available with red handle.

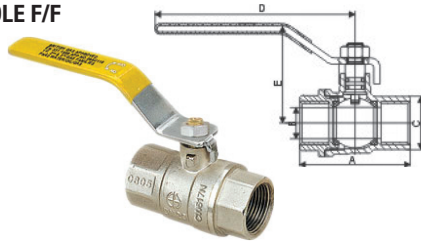

MATERIALS:
Valve Body: CW617N
Handle: Stainless Steel
Ball: Hard chrome-plated brass
Seal: P.T.F.E.
Stem: Brass
Stem-seal: Brass
O-Ring: NBR

Size	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
A	41.8	45	53	61	73	84	98	118
B	8	10	15	20	25	32	40	50
C	21.5	25	32	38.5	47	55.5	68	86
D	65.5	65.5	96	96	120	114.5	176	176
E	41	42	47.5	50	58.5	68	81	91

PC 65 10

BALL VALVE - LEVER HANDLE M/F

Model: EH1081


Forged brass gas ball valve;
yellow stainless steel lever handle;
FxM
ISO7/1 thread,
EN331 standard
PN40~PN25(5MOP/20MOP)

Size: 1/4"~2"

TECHNICAL FEATURES:

According to EN331 standard.
Minimum and maximum working temperature:
-20°C, 120°C.
Available: in all sizes from 1/4" up to 2".

Available with red handle.

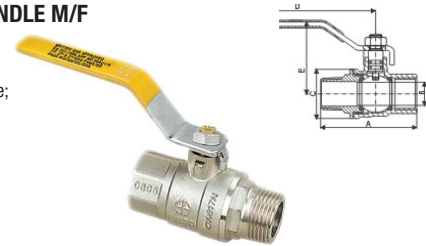

MATERIALS:
Valve Body: CW617N
Handle: Stainless Steel
Ball: Hard chrome-plated brass
Seal: P.T.F.E.
Stem: Brass
Stem-seal: Brass
O-Ring: NBR

Size(mm)	1/4"	3/8"	1/2"	3/4"	1"	1-1/4"	1 1/2"	2"
A	52	55	62	69.5	79	94.5	104.5	130 x
B	8	10	15	20	25	32	40	50
C	21.5	25	32	38.5	47	55.5	68	83
D	65.5	65.5	96	96	120	114.5	176	176
E	41	42	47.5	50	50	68	81	87.5

PC 65 10

BALL VALVE - T HANDLE F/F

Model: EH1082


Forged brass gas ball valve;
yellow butterfly handle;
FxM
ISO7/1 thread,
EN331 standard
PN40(5MOP/20MOP)

Size: 1/4"~1"

TECHNICAL FEATURES:

According to EN331 standard.
Minimum and maximum working temperature:
-20°C, 120°C.
Available: in all sizes from 1/4" up to 2".

Available with red handle.

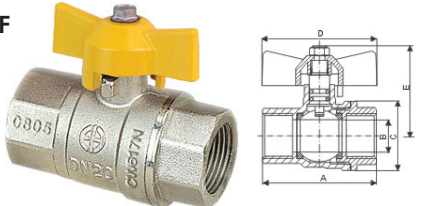

MATERIALS:
Valve Body: CW617N
Handle: Aluminium
Ball: Hard chrome-plated brass
Seal: P.T.F.E.
Stem: Brass
Stem-seal: Brass
O-Ring: NBR

Size(mm)	1/4"	3/8"	1/2"	3/4"	1"
A	41.8	45	53	61	73
B	8	10	15	20	25
C	21.5	25	32	38.5	47
D	53.5	53.5	53	53	62
E	36.5	37	41.5	46	55.5

PC 65 10

BALL VALVE - T HANDLE M/F

Model: EH1083


Forged brass gas ball valve;
yellow butterfly handle;
FxM
ISO7/1 thread,
EN331 standard
PN40(5bar)

Size: 1/4"~1"

TECHNICAL FEATURES:

According to EN331 standard.
Minimum and maximum working temperature:
-20°C, 120°C.
Available: in all sizes from 1/4" up to 2".

Available with red handle.

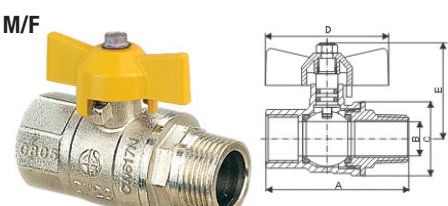

MATERIALS:
Valve Body: CW617N
Handle: Aluminium
Ball: Hard chrome-plated brass
Seal: P.T.F.E.
Stem: Brass
Stem-seal: Brass
O-Ring: NBR

Size(mm)	1/4"	3/8"	1/2"	3/4"	1"
A	52	55	62	69.5	79
B	8	10	15	20	25
C	21.5	25	32	38.5	47
D	53.5	53.5	53	53	62
E	36.5	37	41.5	46	55.5

PC 65 10

MINI BALL VALVE - M/F


Model: EH1106

C.P forged mini ball valve
red handle; FxM
ISO228 thread

Size: 1/8"~3/4"

TECHNICAL FEATURES:

Suitable for domestic water services, heating
and air-conditioning plants, compressed air
systems.
Minimum and maximum working temperature:
-15°C, 100°C.
Available: in all sizes from 1/8" up to 3/4"

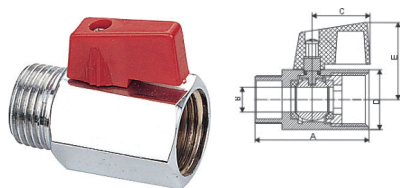

MATERIALS:
Valve Body: C.P. Polished Brass
Handle: ABS
Ball: Hard chrome-plated brass
Seal: P.T.F.E.
Stem: Brass
Stem-seal: Brass
O-Ring: NBR

Size(mm)	1/8"	1/4"	3/8"	1/2"	3/4"
A	36	39.5	40	46	54
B	5.5	8	8	9.5	13.5
C	22	22	22	22	22
D	19	21	21	25	30
E	26.5	28	28	29.5	32.5

PC 65 11

MINI BALL VALVE - F/F


Model: EH1107

C.P forged mini ball valve
red handle; FxF
ISO228 thread

Size: 1/8"~3/4"

TECHNICAL FEATURES:

Suitable for domestic water services, heating
and air-conditioning plants, compressed air
systems.
Minimum and maximum working temperature:
-15°C, 100°C.
Available: in all sizes from 1/8" up to 3/4"

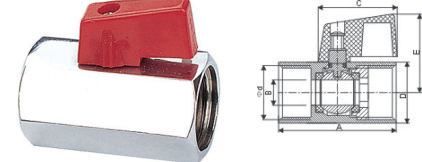

MATERIALS:
Valve Body: C.P. Polished Brass
Handle: ABS
Ball: Hard chrome-plated brass
Seal: P.T.F.E.
Stem: Brass
Stem-seal: Brass
O-Ring: NB

Size(mm)	1/8"	1/4"	3/8"	1/2"	3/4"
A	36	39.5	40	46	54
B	5.5	8	8	9.5	13.5
C	22	22	22	22	22
D	19	21	21	25	30
E	26.5	28	28	29.5	32.5

PC 65 11