



EOLO




+50° C

-10° C

Grey plasticized PVC hose with anti-shock rigid PVC spiral. Perfectly smooth inside, outside slightly corrugated. Very light and flexible. Antistatic version on request.

• Suction of air, fumes, gas, powders, sawing, dust. Air conditioning and ventilation systems, dust extraction, woodworking processing plants.

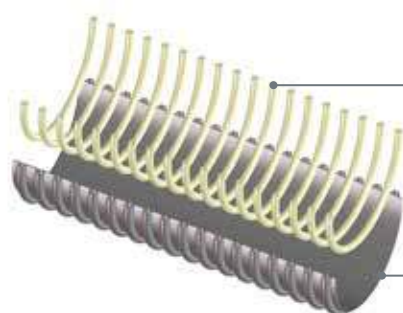

Spirale in PVC rigido antiurto / Anti-shock PVC spiral

Tubo in PVC plastificato / Plasticized PVC hose

Technical data

Codice	Ø Int.	Spess. Min.	Spess. Max.	Peso	R. Curvatura	Depr.	Lg. Rotolo	Vol.
Code	Ins. Ø	Min wall th.	Max wall th.	Weight	Bending	Vac.	Coil lgth.	Vol.
	mm	mm	mm	g/m	mm	m H ₂ O	m	m ³
EO 01 013.0 000.0	13*	0,8	2,8	90	20	4,5	30	0,022
EO 01 016.0 000.0	16	0,8	2,8	100	24	4,5	30	0,026
EO 01 019.0 000.0	19,1	0,8	2,8	120	29	4	30	0,031
EO 01 020.0 000.0	20	0,8	2,8	130	30	4	30	0,036
EO 01 022.0 000.0	22*	0,8	2,8	140	33	4	30	0,038
EO 01 025.0 000.0	25	1,0	2,9	180	38	4	50	0,074
EO 01 030.0 000.0	30	1,0	3,0	220	45	3,5	50	0,104
EO 01 032.0 000.0	31,8	1,0	3,1	240	48	3,5	50	0,110
EO 01 035.0 000.0	35	1,0	3,3	270	53	3,5	50	0,140
EO 01 038.0 000.0	38,1	1,0	3,5	310	57	3	50	0,167
EO 01 040.0 000.0	40	1,0	3,5	330	60	3	50	0,182
EO 01 045.0 000.0	45	1,0	3,8	410	68	3	50	0,213
EO 01 050.0 000.0	50	1,0	4,1	490	75	3	50	0,269
EO 01 052.0 000.0	50,8	1,0	4,1	500	76	3	50	0,273
EO 01 055.0 000.0	55*	1,0	4,2	560	83	3	50	0,304
EO 01 060.0 000.0	60	1,0	4,2	600	90	3	50	0,368
EO 01 063.0 000.0	63,5	1,0	4,2	640	95	3	50	0,387
EO 01 065.0 000.0	65	1,0	4,2	650	98	3	50	0,409
EO 01 070.0 000.0	70	1,2	4,5	700	105	3	50	0,551
EO 01 076.0 000.0	76,2	1,2	4,6	790	114	2,5	50	0,632
EO 01 080.0 000.0	80	1,2	5,1	900	120	2,5	50	0,667
EO 01 090.0 000.0	90*	1,2	5,3	1060	135	2,5	30	0,449
EO 01 100.0 000.0	100	1,2	5,8	1250	150	2,5	30	0,656
EO 01 102.0 000.0	102	1,2	5,8	1280	153	2,5	30	0,668
EO 01 110.0 000.0	110	1,3	5,9	1380	164	2,5	30	0,758
EO 01 120.0 000.0	120	1,3	5,9	1500	177	2,5	30	0,843
EO 01 127.0 000.0	127	1,3	6,0	1630	186	2,5	30	0,913
EO 01 130.0 000.0	130*	1,3	6,0	1660	190	2,5	30	0,959
EO 01 140.0 000.0	140	1,3	6,1	1830	203	2	30	1,055
EO 01 150.0 000.0	151,5	1,3	6,4	2000	217	2	20	0,966
EO 01 152.0 000.0	152,4*	1,3	6,4	2010	219	2	20	0,971
EO 01 160.0 000.0	160*	1,5	7,0	2200	228	1,5	20	1,053
EO 01 180.0 000.0	180*	1,5	7,0	2470	252	1,5	20	1,241
EO 01 200.0 000.0	200	1,5	7,3	2730	275	1,5	20	1,449
EO 01 203.0 000.0	203,2*	1,5	7,3	2780	279	1,5	20	1,470
EO 01 250.0 000.0	250*	1,5	7,6	3600	328	1	10	0,953
EO 01 300.0 000.0	300*	1,5	7,8	4460	375	1	10	1,459

*Disponibile su richiesta, per quantitativi da concordare con l'ufficio vendite / *Available on request, contact our sales office for more info and quantities

I dati tecnici qui riportati sono stati misurati a 23°C e al 50% di umidità / The technical data here reported were measured at 23°C with 50% humidity

