



MARTE A.O.



Blue hose in special antimigration PVC compound reinforced with an antishock rigid PVC spiral.
High mechanical properties, light, flexible, really good bending, resistant to abrasion and weather conditions. Antistatic version on request.

- Suction and delivery of lubricants, crude oils (naphta and diesel oil).

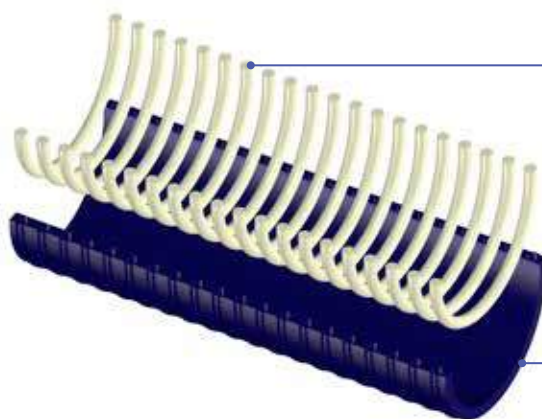

Spirale in PVC rigido antiurto
Anti-shock rigid PVC spiral

Tubo in PVC antiestrazione
Antimigration PVC compound

Scheda tecnica / Technical data

Codice	Ø Int.	Spess. Min.	Spess. Max.	Peso	P.E.	P.S.	Depr.	R. Curvatura	Lg. Rotolo	Vol.
Code	Ins. Ø	Min wall th.	Max. wall th.	Weight	WP	BP	Vac.	Bending	Coil lgth.	Vol.
	mm	mm	mm	g/m	bar	bar	m H ₂ O	mm	m	m ³
MT 01 019.0 000.0	19,1*	19,1	4,0	400	8	24	10	140	50	0,071
MT 01 020.0 000.0	20*	20	4,0	420	8	24	10	140	50	0,074
MT 01 025.0 000.0	25*	25	4,3	550	8	24	10	170	50	0,098
MT 01 030.0 000.0	30*	30	4,4	650	8	24	10	195	50	0,138
MT 01 032.0 000.0	31,8*	31,8	4,4	700	8	24	10	205	50	0,145
MT 01 035.0 000.0	35*	35	4,4	750	7	21	10	220	50	0,164
MT 01 038.0 000.0	38,1*	38,1	4,4	810	7	21	10	235	50	0,193
MT 01 040.0 000.0	40*	40	4,3	830	7	21	10	250	50	0,222
MT 01 045.0 000.0	45*	45	4,4	950	6	18	10	275	50	0,264
MT 01 050.0 000.0	50*	50	4,9	1150	6	18	10	300	50	0,326
MT 01 052.0 000.0	50,8*	50,8	4,9	1170	6	18	10	300	50	0,330
MT 01 055.0 000.0	55*	55	5,3	1400	6	18	10	330	50	0,396
MT 01 060.0 000.0	60*	60	5,4	1550	6	18	10	355	50	0,485
MT 01 063.0 000.0	63,5*	63,5	5,6	1690	6	18	10	370	50	0,511
MT 01 070.0 000.0	70*	70	5,8	1910	5	15	10	410	50	0,611
MT 01 076.0 000.0	76,2*	76,2	5,8	2060	5	15	10	440	50	0,676
MT 01 080.0 000.0	80*	80	5,9	2210	5	15	10	460	30/50	0,548/0,795
MT 01 090.0 000.0	90*	90	6,2	2610	4	12	10	530	30	0,611
MT 01 100.0 000.0	100*	100	7,1	3310	4	12	9	600	30	0,782
MT 01 102.0 000.0	102*	102	7,1	3370	4	12	9	600	30	0,795
MT 01 110.0 000.0	110*	110	7,2	3670	4	12	9	690	30	1,017
MT 01 127.0 000.0	127*	127	7,3	4220	4	12	9	800	30	1,241
MT 01 150.0 000.0	151,5*	151,5	9,0	6330	3	9	8,5	1300	20	1,345
MT 01 152.0 000.0	152,4*	152,4	9,0	6330	3	9	8,5	1300	20	1,352
MT 01 203.0 000.0	203,2*	203,2	10,7	10200	2	6	7	1200	10	2,198

*Disponibile su richiesta, per quantitativi da concordare con l'ufficio vendite / * Available on request, contact our sales office for more info and quantities

I dati tecnici qui riportati sono stati misurati a 23°C e al 50% di umidità / The technical data here reported were measured at 23°C with 50% humidity