


# HOSE REELS IN STAINLESS STEEL - Series 420

swivelling and fixed



The hose-reels with flexible hose are the handiest, quickest, safest and cheapest way of transferring fluids such as water, hot water, etc. With the hose-reel, hose rewinding becomes quick and sure; for an orderly workplace free of hindrances, while safeguarding against wear and eventual breakage of the hoses themselves.

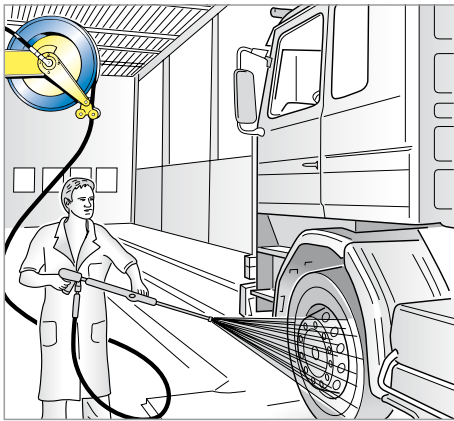

The hose reels are equipped with an universal hose stop; those with hose are provided with a 0,6 m connection hose

## Water-Hot water 130° C - 200 bar

Series	Article	Relative capacity	Hose length	∅ hose	Connection inlet	Connection outlet
420	0A49400	20 l/min	without hose	/	F 3/8" G	F 1/2" G
	0A44210	20 l/min	12 m (0A83912)	3/8"	F 3/8" G	F 3/8" G
	0A44215	20 l/min	18 m (0A83918)	3/8"	F 3/8" G	F 3/8" G
	0A44216	18 l/min	20 m (0A83921) hygienic	3/8"	F 3/8" G	F 3/8" G

## Water-Hot water 130° C - 100 bar

Series	Article	Relative capacity	Hose length	∅ hose	Connection inlet	Connection outlet
420	0A49401	40 l/min	without hose	1/2"	F 1/2" G	F 1/2" G
	0A44220	35 l/min	15 m (0A81216) hygienic	1/2"	F 1/2" G	M 1/2" G

## Air-Cold water - 20 bar


Series	Article	Relative capacity	Hose length	∅ hose	Connection inlet	Connection outlet
420	0A49401	800 l/min	without hose	/	F 1/2" G	F 1/2" G
	0A44607	760 l/min	15 m (0A81315)	1/2"	F 1/2" G	M 1/2" G
	0A44612	690 l/min	12 m (0A83712)	3/8"	F 1/2" G	M 3/8" G
	0A44618	640 l/min	18 m (0A83718)	3/8"	F 1/2" G	M 3/8" G

without hose  
with hose

N° 1 packing m<sup>3</sup> 0,060  
N° 1 packing m<sup>3</sup> 0,060

Kg 13,7  
from Kg 21 to Kg 23

The adjustable arms can be easily repositioned according to needs



## OVERALL DIMENSIONS

Series 420 open Swivelling and Fixed

